


## Size 24B Sleeve housing, high type, top opening hole, stainless steel with double locking latch

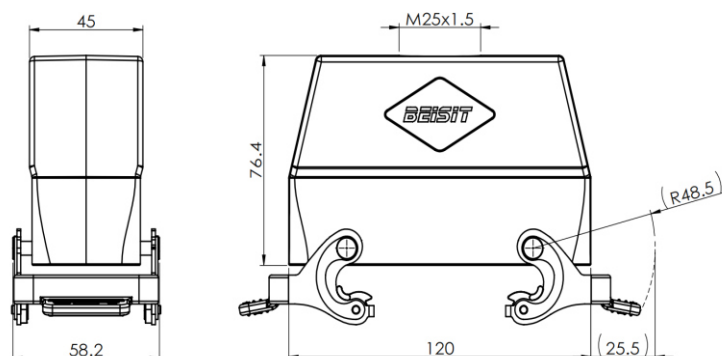

Typecode H24B-TOH-2LS-M25  
ID 1 007 01 0000628

### Technical Data

#### Product Properties

|                         |                                                |
|-------------------------|------------------------------------------------|
| Series                  | Size 24B                                       |
| Mating with             | HE-024, HEE-046, HDD-064,<br>HDD-108, HK-004/8 |
| Housing type            | Sleeve housing, high type                      |
| Cable outlets direction | Top opening hole                               |
| Cable outlets           | M25x1.5                                        |
| Protection Class        | IP67                                           |
| Impact strength         | IK08                                           |
| Temperature range       | -40 °C ... 125 °C                              |
| Standard                | DIN EN 175301-801                              |

#### Insert

|                  |                   |
|------------------|-------------------|
| Housing material | Die-cast aluminum |
| Color            | Gray (RAL 7037)   |
| Latch            | Stainless steel   |

#### Commercial data

|                   |       |
|-------------------|-------|
| Weight            | 383 g |
| Packaging unit    | 1 pc  |
| Country of origin | CN    |

### Features

- Die casting of aluminum
- Stainless steel with double locking latch
- Top opening hole
- Resistant to salt spray
- Approval: UL94-V0
- RoHS-compliant

\*The design data are listed here, and the changes to the product are not described here. For unfinished matters, please contact customer service. It is the user's responsibility to verify functionality, compliance with applicable laws and instructions, and electrical safety in specific applications.