


## Size 32B Sleeve housing, Lateral opening hole, stainless steel with double locking latch

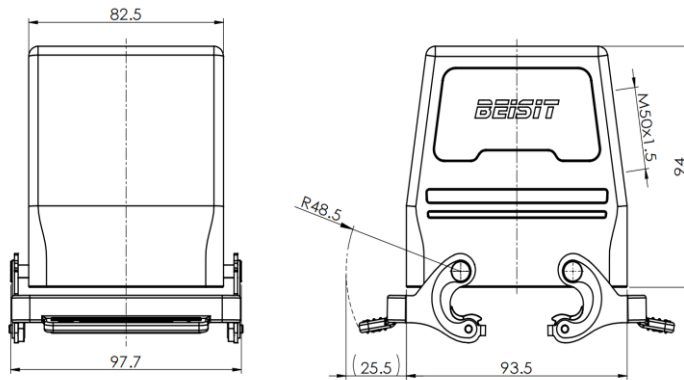

Typecode     H32B-SO-2LS-M50  
ID                1 007 01 0000782

### Technical Data

#### Product Properties

|                         |                                            |
|-------------------------|--------------------------------------------|
| Series                  | Size 32B                                   |
| Mating with             | HE-032, HEE-064, HD-080<br>HDD-144, HSB-12 |
| Housing type            | Sleeve housing                             |
| Cable outlets direction | Lateral opening hole                       |
| Cable outlets           | M50 x 1.5                                  |
| Locking type            | Double locking lever                       |
| Protection Class        | IP65, IP67                                 |
| Impact strength         | IK08                                       |
| Temperature range       | -40 °C ... 125 °C                          |
| Standard                | DIN EN 175301-801                          |

#### Insert

|                  |                   |
|------------------|-------------------|
| Housing material | Die-cast aluminum |
| Color            | Gray (RAL 7037)   |
| Latch            | Stainless steel   |

#### Commercial data

|                   |       |
|-------------------|-------|
| Weight            | 596 g |
| Packaging unit    | 1 pc  |
| Country of origin | CN    |

### Features

- Die casting of aluminum
- Stainless steel with double locking latch
- Lateral opening hole
- Resistant to salt spray
- Approval: UL94-V0
- RoHS-compliant
- Applicable to surface high-density

\*The design data are listed here, and the changes to the product are not described here. For unfinished matters, please contact customer service. It is the user's responsibility to verify functionality, compliance with applicable laws and instructions, and electrical safety in specific applications.