


## Size 32B Surface mounted housing

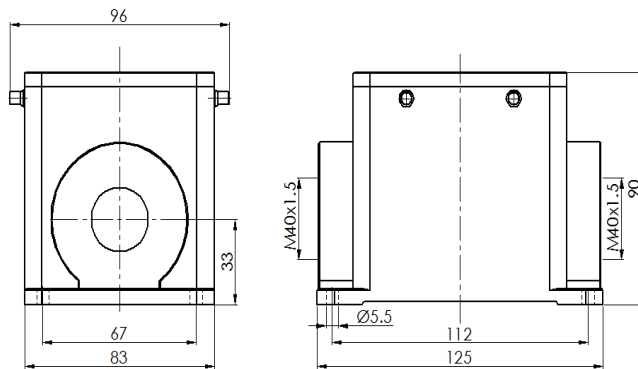

**Typecode** H32B-SM-4PR-2M25  
**ID** 1 007 01 0000832

### Technical Data

#### Product Properties

|                         |                                            |
|-------------------------|--------------------------------------------|
| Series                  | Size 32B                                   |
| Mating with             | HE-032, HEE-064, HD-080<br>HDD-144, HSB-12 |
| Housing type            | Surface mounted housing                    |
| Cable outlets direction | Side entry                                 |
| Cable outlets           | M25 x 1.5, 2                               |
| Installation mode       | Panel mount                                |
| Protection Class        | IP65                                       |
| Impact strength         | IK08                                       |
| Temperature range       | -40 °C ... 125 °C                          |
| Standard                | DIN EN 175301-801                          |

#### Insert

|                  |                   |
|------------------|-------------------|
| Housing material | Die-cast aluminum |
| Color            | Gray (RAL 7037)   |
| Seal             | NBR, black        |

#### Commercial data

|                   |       |
|-------------------|-------|
| Weight            | 840 g |
| Packaging unit    | 1 pc  |
| Country of origin | CN    |

### Features

- Die casting of aluminum
- Side entry
- Surface fixed installation
- NBR, black
- Resistant to salt spray
- Approval: UL94-V0
- RoHS-compliant

\*The design data are listed here, and the changes to the product are not described here. For unfinished matters, please contact customer service. It is the user's responsibility to verify functionality, compliance with applicable laws and instructions, and electrical safety in specific applications.